

PEC, University of Technology, Sector-12, Chandigarh

No. PEC/UE/2017/

Dated:

Notice Inviting Quotations

Sealed Quotation are hereby invited on behalf of Director, PEC University of Technology, Sector-12, Chandigarh on item rate basis for the following works and will be opened in the office of the undersigned on dated 25.01.2017 at 3:30 P.M. The quotations will be received up to 3:00 P.M.

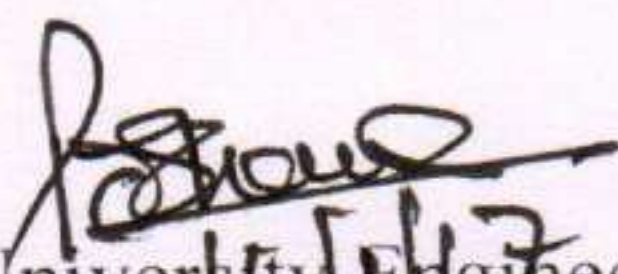
Name of Work: Providing and fixing of M.S. railing on Existing Boundary wall of H. No. 610 & 611 at PEC University of Technology Sector-12, Chandigarh

Schedule of Work

Sr. No.	Brief Description	Qty	Unit	Rate	Amount
As per schedule attached					

Terms & Conditions:

1. The work shall be carried out as per CPWD specification and as per direction of the Engineer-in-charge.
2. No T&P shall be issued to the agency.
3. The necessary recoveries such as Income Tax, Sale tax, Labour Cess etc. applicable shall be made from the bill.
4. Time allowed 30 days.
5. Nothing extra shall be paid on any other account.

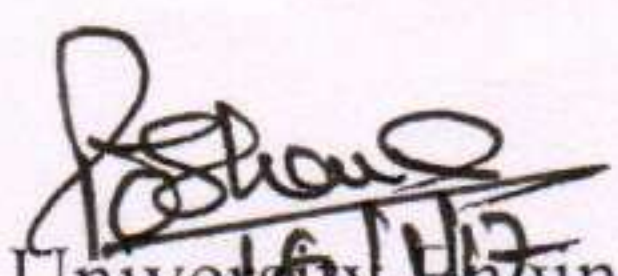

University Engineer

Dated 17 JAN 2017,

Endst. No. 959-962

Copy of the above is forwarded to the following:

1. Registrar
2. Chairman Estate & Works
3. Head, Computer Centre, with a request to upload on the Institute website
4. Notice Board


University Engineer

016

Name of Work: Providing & Fixing of M.S. Railing on Existing Boundary Wall of H. No. 610 & 611 at PEC University of Technology, Chandigarh

Schedule of Quantity

S.N.	DSR No.	Description of Item	Qty	Unit	Rate in Rs.	Amount in Rs.
1	15.7	Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-charge.				
1.1	15.7.4	In cement mortar	1.50	cum		
2	4.1	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level :				
2.1	4.1.3	1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size)	1.5	cum		
3	5.9	Centering and shuttering including strutting, propping etc. and removal of form for :				
3.1	5.9.15	Small lintels not exceeding 1.5 m clear span, moulding as in cornices, window sills, string courses, bands, copings, bed plates, anchor blocks and the like	13	sqm		
4	10.25	Steel work welded in built up sections/ framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required.				
4.1	10.25.2	In gratings, frames, guard bar, ladder, railings, brackets, gates and similar works	840	Kg.		
5	13.16	6 mm cement plaster of mix : 13.16.1 1:3 (1 cement : 3 fine sand)	10	sqm		
6	13.61	Painting with synthetic enamel paint of approved brand and manufacture to give an even shade : 13.61.1 Two or more coats on new work	65	sqm		
7	15.60	Disposal of building rubbish / malba / similar unserviceable, dismantled or waste materials by mechanical means, including loading, transporting, unloading to approved municipal dumping ground or as approved by Engineer-in-charge, beyond 50 m initial lead, for all leads including all lifts involved.	2	cum		
Total						